

# **RoboCupRescue 2011 - Robot League Team PANDORA (Greece)**

Vassilios Petridis, Zoe Doulgeri, Loukas Petrou, Anastasios Delopoulos, Andreas Symeonidis, Emmanouil Tsardoulis, Charalampos Serenis, Nikos Zikos, Petros Agelidis, Miltos Allamanis, Nikos Michailidis, Dimitrios Papageorgiou, Michail Skolarikis, Marina Stamatiadou, Nikos Tolis, Dimitrios Vitsios

Department of Electrical and Computer Engineering  
Aristotle University of Thessaloniki  
Aristotle University Campus  
541 24 Thessaloniki, Greece  
<http://www.ee.auth.gr>  
Correspondence email: loukas@eng.auth.gr

**Abstract.** This is the TDP of the PANDORA Robotics Team of the Aristotle University of Thessaloniki to sign on for the 2011 RoboCupRescue competition. We are going to use one tracked platform aiming at scoring the victims in the yellow arena and in the blue arena (grasping and carrying a specific object, such as a small bottle of water).

## **Introduction**

The PANDORA Robotics Team (**P**rogram for the **A**dvancement of **N**on **D**irected **O**perating **R**obotic **A**gents) of the Department of Electrical and Computer Engineering (DECE) of Aristotle University of Thessaloniki (AUTH), Greece aims in developing an experimental robotic platform for space exploration and victim identification. Overall objectives of the team are the application of the existing know-how on a real-life problem, the advancement of the group's state-of-the-art expertise. The PANDORA Robotics Team was founded in 2005 and has already participated in the RoboCupRescue 2008 and 2009 competitions. This year, the team intends to participate in the yellow and blue arenas.

## **1. Team Members and Their Contributions**

The team comprises 5 faculty members of varying expertise and a compilation of postgraduate and undergraduate students. The following list provides the names and responsibilities of the team members.

### **Team Mentors**

- Vassilios Petridis, Professor
- Zoe Doulgeri, Professor
- Loukas Petrou, Associate Professor

- Anastasios Delopoulos, Assistant Professor
- Andreas Symeonidis, Lecturer

#### **Management Team**

Alexios Papadopoulos, Marina Stamatiadou

#### **AI Team**

*Team Leader:* Emmanouil Tsardoulis

*SLAM:* Georgios Apostolidis, Panagiotis Thomaidis

*Planner:* Aikaterini Iliakopoulou, Andreas Kargakos

*Kinematic Model:* Nikolaos Zikos

#### **Software Architecture Team**

*Team Leader:* Miltiadis Allamanis

*Testing:* Marina Stamatiadou, Pelagia Sikoudi- Amanatidou

*GUI:* Dimitrios Vitsios, Alaexandros Kalliontzis, Kostas Lamaris

#### **Vision Team**

*Team Leader:* Michail Skolarikis

*Face recognition:* Fragkiskos Koufogiannis

*Tag/Hole/Motion detection:* Evaggelos Skartados, Georgios Aprilis, Vasilios Tsakalis

#### **Voice recognition Team**

*Team Leader:* Nikolaos Zikos

*Sound control:* Petros Agelidis

#### **Electronic design Team**

*Team leader:* Charalampos Serenis

*Sensors:* Nikolaos Tolis, Dimitrios Kanlis

*Integration:* Alexios Papadopoulos, Nikolaos Tselepis

#### **Mechanical Team**

*Team Leader:* Nikolaos Michailidis

*Motor control:* Nikolaos Kourous

#### **RoboArm Team**

*Team Leader:* Nikolaos Michailidis

*Arm Kinematics:* Dimitrios Papageorgiou

*Trajectory Planning:* Nikolaos Zikos, Maria Grammatikopoulou

The team is going to be represented by 11 members in the competition. Names are going to be listed in the registration form.

## **2. Operator Station Set-up and Break-Down (10 minutes)**

Three operators are needed for setting up the PANDORA robot: the head operator of the system, who carries the base station case, and two operators that carry the platform case.

The initialization process is realized as follows:

- Transfer all objects in the area and deploy (3 minutes).
- Activate the platform and the base station (3 minutes).
- Launch the PANDORA robot OS (2 minutes).

- Perform communication check, in order to establish and validate Wi-Fi connection (1 minute).
- Perform system check and diagnostics, in order to verify that all the systems of the platform are working properly (1 minute).

### 3. Communications

Following RCR regulations, we are going to use W-LAN 802.11a (5 GHz) and will wait to be assigned with a channel/band from the organizers during the competition.

**Table 1.** PANDORA communication protocol

| Rescue Robot League |              |            |
|---------------------|--------------|------------|
| PANDORA (GREECE)    |              |            |
| Frequency           | Channel/Band | Power (mW) |
| 5.0 GHz - 802.11a   |              | 100        |

### 4. Control Method and Human-Robot Interface

The PANDORA robot will operate in three modes: the *fully autonomous mode*, where a number of simultaneous processes will be executed in order to achieve autonomous exploration and victim identification, the *tele-operation mode*, where the robot will be totally manipulated by an experienced user, and the *semi-autonomous mode*, where the robot will be steered by a user, nevertheless a number of process will assist the user.

In order to ensure a flexible and modular scheme where reconfiguration is possible, we opted for a component-based software architecture. The selected architecture ensures easy testing and integration, while it decouples the overall system from each component's actual implementation.

#### 4.1 PANDORA Software Architecture

Having considered various off-the-shelf middleware, we adopted ROS (<http://www.ros.org>) for PANDORA's middleware. A number of factors were considered during the middleware selection process. A messaging communication scheme was preferred to a typical RPC-style middleware, due to its inherent ability to promote loose coupling. Furthermore, messaging provides asynchronous communications with the ability to control dataflow, which is extremely important for complex interconnected systems. The basic advantages of ROS are: open-source nature, transparent architecture, wide-spread usage, interoperability with other robot frameworks, quality of the development toolchain and extensive documentation.

ROS comprises a peer-to-peer network of components (denoted as nodes), which communicate via messages through the respective ROS infrastructure. The channels that messages are sent through are called topics. RPC-style communication is also

achieved through services and data persistence is achieved through the Parameter Server.

PANDORA software architecture consists of several packages implementing nodes that perform different tasks (vision, sound, navigation, etc). The selected software design attempts to decouple nodes from each other as much as possible, thus minimizing the induced complexity. For all PANDORA packages, provided and required interfaces were defined through the respective ROS interfaces, thus ensuring language independence and easy integration. Coding standards were defined and are applied for all packages. Figure 1 depicts the PANDORA nodes and their interconnections, which are discussed next.

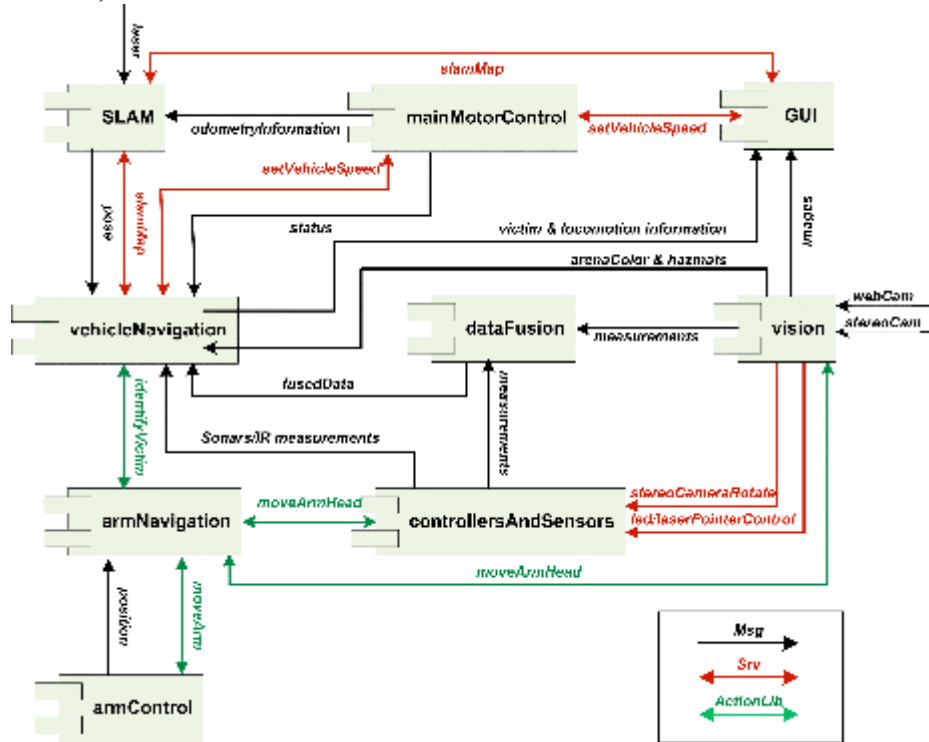


Fig. 1. PANDORA nodes and their interaction through messages, services and action libs

- **Controllers & Sensors:** it controls data flow from the microcontrollers, acting as a Hardware Abstraction Layer for the robot. This package handles most of the sensors, such as thermal and voice sensors. In addition, some actuators are also controlled.
- **SLAM:** responsible for performing the Simultaneous Localization and Mapping (SLAM) for the robot, as well as storing and providing map data.
- **Robot Kinematic:** a library package (not shown) solving the kinematic model of the vehicle, providing utility functions for other components.
- **Main Motor Control:** responsible for controlling the main motors of the robot and implements basic error handling. Through the *Robot Kinematic* library, the desired

robot linear and rotational velocities are set. This package has been designed to be common in all three robot operation modes.

- **Arm Control:** responsible for solving the kinematic model of the robotic arm, controlling the arm actuators to reach a goal via a specified trajectory.
- **Vision:** responsible for handling the stereo camera used for exploration and possible victim locations, as well as the camera situated on the robotic arm, used for detailed victim identification.
- **Vehicle Navigation:** responsible for motion planning and navigating the robot through the unexplored regions of the map or towards a possible victim for further identification. The package is also responsible for storing and providing victim-related data, such as victim position.
- **Arm Navigation:** responsible for navigating the arm configuration space searching for a victim in that area.
- **Data Fusion:** it decouples low-level sensor measurements for victim identification and high-level navigation components. Furthermore, it is responsible for performing sensor fusion and forwarding possible victim positions (or directions) to the navigation packages.
- **GUI & Connectivity:** provides a Graphical User Interface for the robot operator. In addition it provides the remote controls for tele-operation.

**Table 2.** Information displayed in the respective GUI tabs

| PANDORA GUI                                |                           |                                  |
|--------------------------------------------|---------------------------|----------------------------------|
| Navigation Tab                             | Victim identification Tab | Debugging Tab                    |
| Map                                        | Map                       | Map                              |
| Web camera streaming                       | Coverage                  | Web camera streaming             |
| Operating mode                             | Voronoi diagram           | Stereo vision camera streaming   |
| Temperature reading                        | Victims number            | Motors speed                     |
| Distance from Sonar sensors                | Victims places            | Current robot position           |
| Distance from IR sensors                   | Goals                     | Sensors status                   |
| CO <sub>2</sub> measurement reading        | Path to current goal      | Temperature reading              |
| Noise source direction                     | Noise source direction    | Compass bearing                  |
| Compass bearing                            |                           | Distance from Sonar sensors      |
| Robot angle state                          |                           | Distance from IR sensors         |
| Platform inclination on rear and side view |                           | CO <sub>2</sub> quantity reading |
| Wi-Fi signal strength                      |                           | Noise source direction           |
| Battery level                              |                           |                                  |

#### 4.2 PANDORA Graphical User Interface (GUI)

PANDORA provides a user friendly GUI for visualizing information and operating the robot. Three tabs are available, containing information related to navigation, victim identification and debugging. In each of the tabs, related information is displayed, as depicted in Table 2. Nevertheless, the operator can dynamically add/remove sensor information and modify the type and the layout of the widgets displayed in each tab, since PANDORA GUI adopts a widget-like architecture. A mockup of the GUI is provided in Figure 2.

When on *tele-operation* mode, the robot vehicle is controlled using a wired game-pad or a keyboard, while the robot arm is controlled using a joystick. When on the *autonomous* mode, GUI is only for visualizing/monitoring and no intervention is allowed, up to the point that a victim is recognized. Then, PANDORA sends an interrupt signal to activate the GUI and expects proper operator action in order to continue.

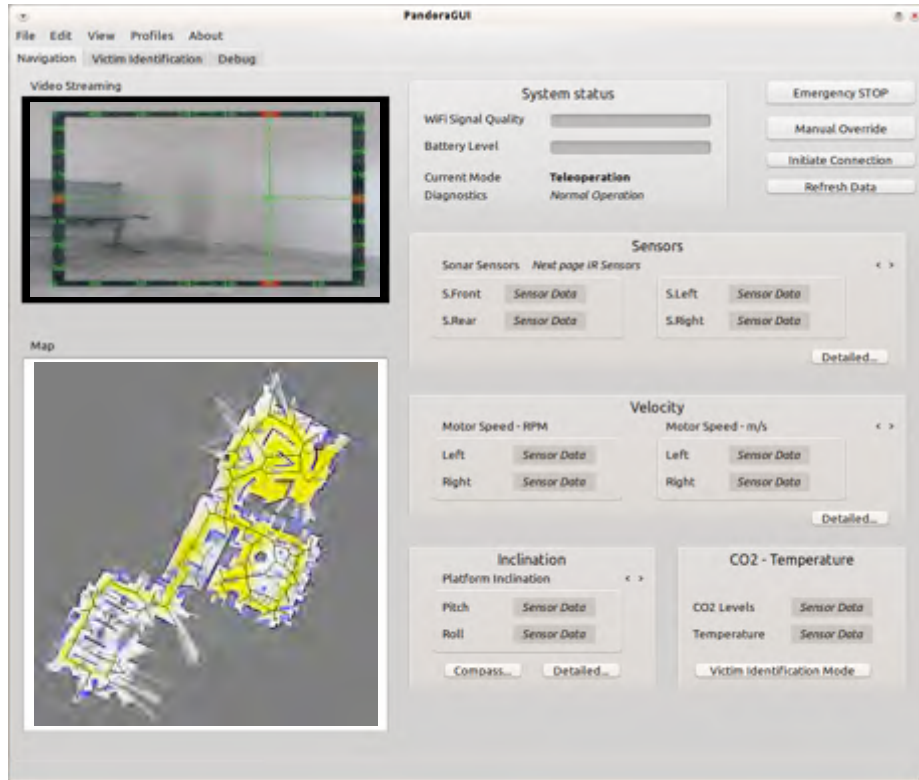


Fig. 2. PANDORA GUI – Navigation tab overview

### 4.3 PANDORA Hardware Architecture

Figure 3 provides an overview of the hardware peripherals needed to interface with the various sensors of the system. The lowest-level communication protocol to the sensors is implemented through their connection to two Atmel AT90XMEGA128A1 microcontrollers, which employ DMA to read the sensor values in parallel and send data to the PANDORA software infrastructure through the serial port, employing a custom-design communication protocol.

In order to ensure easy debugging of the hardware components and their inter-communication, an LCD touch screen can be connected to the microcontrollers and probe the system for correct functionality and possible errors.

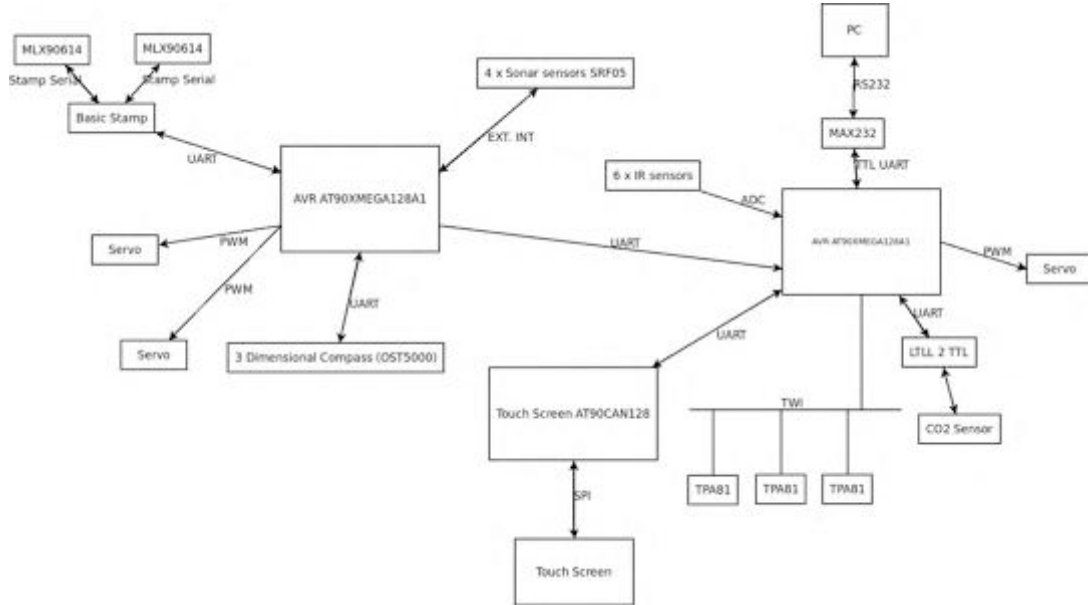


Fig. 3. Layout of the hardware peripherals connected on the microcontrollers

## 5. Map generation/printing

### 5.1 SLAM

PANDORA implements an SMG (Scan Match Genetic) SLAM scheme for space exploration. It employs an occupancy grid map and performs a scan-to-map match, instead of the traditional scan-to-scan matching. Scan matching is realized through a genetic algorithm mechanism (Random Restart Hill Climbing) and ray reduction is employed for performance reasons.

One of the two most important features of SMG SLAM is ray-picking; the main idea is to reduce complexity and time needed for matching by preprocessing the scan and selecting rays that are “critical” for the matching process. We define “critical” in the sense that the remaining ray information is redundant to the matching process, since the “critical” scans act as features of the scan, even if they are extracted from heuristics and not from any feature extraction method. A hill climbing mechanism has been adopted for the identification of the correct transformation between the current scan and the global map (which is the inverse of the robot translation and rotation). Hill climbing is a very popular and efficient genetic method for finding optimal solutions to complex problems. Its setup is like a genetic algorithm but the population consists only of one individual.

The individual genome in the genetic method comprises three numeric values ( $\langle D_x, D_y, D_{\theta} \rangle$ ), representing the correct transformation for scan matching. The fitness value for the individual is calculated by summing the possibilities of occu-

pancy in the selected laser rays, according to the transformation of the hill climbing individual.



**Fig. 4.** Initiating the SMG SLAM process

RRHC (Random Restart Hill Climbing) or SHC (Shotgun Hill Climbing) are employed for hill climbing [1]. Upon random restart of the hill climbing process, the individual genome is initialized at the supposed new robot transformation, based on the speed or the kinematic model, and a mutation is performed. If the fitness value of the individual is higher than the previous one, we perform a mutation at the new individual. The process concludes when an individual has a lower fitness value than its predecessor; the global best result is updated (if needed), and the individual is randomly initialized. The above process stops after 30000 iterations or when the best fitness value reaches a satisfying threshold. This method, adding the time of the ray reduction, has a frequency of 10 Hz.

Finally, a particle filter is implemented in order to cope with the loop closing problem. Each particle has an assumption on the environment (the map) and an assumption on the robot pose. For each iteration of the particle filter, Gaussian noise is inserted on the motor velocities, based on the results of the kinematic model. Then scan matching is performed, the particles update their maps and a weight is calculated for each particle. Finally re-sampling is performed, resulting to a better particle population.

## 5.2 Navigation

PANDORA's navigation module comprises three sub-modules: the *Planner*, the *Navigator* and the *Data Fusion*.

The *Planner* is the coordinator of the robot's artificial intelligence. It monitors all other PANDORA nodes, providing them with input and allowing them to take control and perform specific tasks. It defines a goal (target) in the environment according to the circumstances, creates the path to it, and feeds the navigator in order to follow it. Also, it (de)activates the stereo camera, sound and arm navigation nodes (subsystems).



**Fig. 5.** Creating the map in an explored space

In the default operation mode the *Planner* performs simple space exploration. Goals are defined by applying the GDV (Generalised Voronoi Diagram) [2] in the unoccupied space. The result of the process is a graph, where nodes are the boundaries of the GDV, as well as its cross-paths. The main idea is to explore all GDV nodes in an efficient manner, since the resulting GDV graph is a skeletonization of the free space. Thus, graph exploration implies environment exploration to a great extent, also. The covered space is stored in an occupancy grid called *coverage*, having the same size as the map, and holding the information of covered space by means of victim coverage. The coverage map is updated in every SLAM iteration by applying a patch on the coverage map, depending on the robot's pose. The patch is a sum of the effect of all the victim sensors on the robot.

After the goal is selected, the *Planner* has to propose a path for the robot to follow. Uniform space decomposition is employed for path creation, given its speed, efficiency and capability to cope with complex routing problems. A graph is constructed comprising nodes which are the points from a uniform decomposition of the free space, as well as the robot position and the goal. The optimal path is extracted by applying the Dijkstra algorithm [3].

The *Navigator* follows the path dictated by the *Planner*. In fact, it provides input (velocities) to the *Main Motor Control* node, in order to navigate on the given path. When the robot reaches the designated goal (the end of a path), the *Navigator* informs the *Planner* and awaits for a new path. It follows a two-layered architecture: the “path follower” and the “obstacle avoider” layers. In each step, the “path follower” calculates the appropriate velocities for the robot, while the “obstacle avoider” is assigned to correct the velocities, so that the robot avoids the obstacles efficiently, irrespective of the path. The *Navigator* may also be assigned with another task (goal) before completing its current one (e.g. a possible victim location is identified). In that case, the

*Navigator* stores its state in a stack and serves the other path request. In case multiple interruptions occur, the *Navigator* follows a similar process.


The *Data Fusion* module is responsible for filtering out the messages generated by PANDORA sensors (CO<sub>2</sub>, MLX thermal sensor, TPA thermal sensor, sound module, camera). It stores a set of thresholds of all sensors, which are the possibility values of an eligible valid measurement. Given that a sensor measurement exceeds the threshold, *Data Fusion* informs the *Planner* with details. One should mention that thresholds are not hard-coded and are not crisp; rather, a flexible mechanism has been implemented so that the *Planner* is informed if a sensor has an almost “valid” value. Upon victim identification, *Data Fusion* overrides the *Planner* and communicates with the *Arm Navigation* node directly, until the identification process completes. Then, control is passed back to the *Planner*. Messages communicated by *Data Fusion* abide by a predefined uniform format, containing the sensor type, the probability of a measurement to be valid, and its direction, in case the sensor is directional.

## 6. Sensors for Navigation and Localization

The PANDORA robotic platform is equipped with several sensors in order to determine its current position and its distance from various objects. These sensors are discussed next.

### 6.1 Laser Range Finder (Hokuyo URG-04LX)

For map creation a Hokuyo URG-04LX Laser Range Finder (Figure 6) has been installed. It has a viewing angle of 240° and a detection range of 20mm up to 4m. The angular resolution is 0.36°, which gives 667 measurements in a single scan, while its linear resolution is 1mm. Measurement accuracy varies from 10mm (for distances from 20mm to 1m) to 1% of the measurement for distances up to 4m (Fig. 6). It operates on 5V DC (possible error of +/- 5%) and has a current consumption of 500mA.

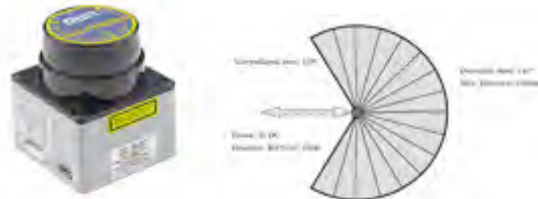

**Fig. 6.** Laser sensor (Hokuyo URG-04LX) and its field of view

### 6.2 Ultrasonic Sensors

Five ultrasonic SRF05 sensors (Figure 7) are situated around the robot. They use a simple I/O interface for communicating with a microprocessor, publishing a pulse with width proportional to the distance of the object. Their power consumption is very low (approx. 0.02W). In the front part of the vehicle they will be used to prevent the vehicle from bumping on obstacles. SRF05 sensors have a detection range of 3cm to 4m and will be used as a complement to the Laser Sensor.



**Fig. 7.** Devantech SRF05 Ultra Sonic Ranger

### 6.3 Infrared Sensors

Infrared sensors are placed both on the left and on the right side of the robot and they will cooperate with the ultrasonic sensors in order to give an accurate measurement of the distance of the robot from any obstacle. GP2Y0A21YK (Figure 8) infrared sensors were selected. Their detection distance range is small (10 cm – 80cm), thus they are assigned with monitoring the close surroundings of the robot. One of the sensors is assigned to measure the distance between the bottom side of the robot and the ground, so as to fire an alarm in case the robot is in danger of falling.



**Fig. 8.** Sharp GP2Y0A21YK Distance Measuring Sensor

## 7. Sensors for Victim Identification

In order to accurately identify a victim and pinpoint his/her location, a number of sensors have been installed, providing input to sophisticated detection algorithms. Specifically, a stereo vision camera, thermal sensors, a CO<sub>2</sub> sensor and three microphones are being used. Sensor results are then fused to determine the behavior of the robot.

### 7.1 Vision

The autonomous platform is equipped with a stereo vision camera, STOC by Videre Design (Figure 9) and a standard web camera to offer the requested set of detection and identification services. Furthermore, stereo vision processing enhances PANDORA's ability to calculate distance from the victim.



**Fig. 9.** Videre Design STOC-6cm

During *tele-operation*, the web camera transmits a video stream to the control station, for the operator to have a visual sense of the robot's surroundings in real time.

All vision modules have been developed in C++ and heavily exploit OpenCV libraries [4]. PANDORA *Vision* provides the following functionality:

- *Hole detection and localization.* Detection is performed by fusing the information extracted by three separate modules:

- i) Edge detection of a de-noised version of 2D scene image is used to detect closed boundaries which are next filled and considered as BLOBs [5].
- ii) Color segmentation of the scene image detects areas neighboring to wall surfaces.
- iii) Intensity thresholding outputs dark regions usually corresponding to holes.

Fusion of the above cues results to connected components at the locations of holes on a single image. Time persistent BLOBs are detected as holes. Size and shape constraints enhance detection accuracy. Localization consists of 2D information and corresponds to the specification of the direction at which the hole is detected.

- *Three Dimensional Wall Reconstruction.* The stereo camera is used to extract 3D points of the scene. A laser light grid is used to increase registration accuracy and thus more accurate depth estimation. The set of 3D points is next fed to a RANSAC like algorithm that clusters points to coplanar groups. The output is both the number and parameters of the detected walls, plus a label for each of the input points indicating the id of the wall it resides on.

- *Face detection.* The classic Viola-Jones algorithm [6] has been adopted. A support utility allowing training on a custom set of faces has been developed to allow for replacing real human faces by other human-like artifacts (e.g., dolls).

- *Skin detection.* Skin detection is based on a pixel by pixel classification of its color coordinates. Statistical analysis of skin-colored pixels has been performed for determining the boundaries of the region of the color space representing human skin.

- *Hazmat and 3EWM pattern detection.* A general purpose logo detection algorithm has been developed for detecting specific flat shape patterns been robust w.r.t. affine transformations based on [7] and [8]. The algorithm is trained to recognize a pattern on the basis of the SIFT [9] salient point descriptors – their value and the geometry of their locations. Test images are processed for the extraction of SIFT local points and a greedy procedure is followed in order to obtain the best possible alignment of pattern's local descriptors to the (many) similar descriptors of the test image. A K-D tree is used for speeding up this procedure. Geometric compatibility combined with appearance compatibility (measured as the similarity between the descriptors) is used to determine whether the pattern appears on the examined image. The same process is repeated for each pattern.

- *Map boundary detection.* Colored lines are detected on the basis of their RGB content, a scheme similar to skin detection is employed.

## 7.2 Temperature

We consider that temperature differences in the environment could imply victims. Thus we have installed Focal Plane Array (FPA) thermal sensors, in order to compare temperature values, find fluctuations and make an estimate of a victim's position, if one is found. The TPA81 (Figure 10) is a thermopile array (thermocouples connected in series), together with a silicon lens and associated electronics, which detects infrared in the 2um-22um range (the range of radiant heat). It can measure the temperature of 8 adjacent points, as well as the ambient temperature, simultaneously. It can detect victim's temperature within 2 meters and its typical field of view is 41° by 6. It is

connected to a microprocessor via an I<sup>2</sup>C interface and updates its values at a rate of approximately 20Hz.



**Fig. 10.** TPA81 IR thermal sensor

The MLX90614 Infrared Thermometer Module is a high accuracy non-contact thermometer based on a thermopile developed by Melexis. The sensor has a 90° field of view and 0.1 °C resolution. Communication is achieved through the Parallax basic Stamp serial protocol. The MLX90614 sensor is designed for non-contact temperature measurements of objects placed within the sensor's cone of detection. The sensor is used to identify a heat source as a victim or reject it as a false alarm. Therefore, two sensors are located on the head of the robotic arm.



**Fig. 11.** The MLX90614 Infrared Thermometer

### 7.3 CO<sub>2</sub> sensor

The CO<sub>2</sub> sensor (Figure 12) installed measures the concentration of CO<sub>2</sub> gas in the environment. For the detection of the human respiration, we simply track fluctuations in the concentration of CO<sub>2</sub> in the air. The selected sensor can detect concentration of CO<sub>2</sub> gas, from 0 – 50,000ppm.



**Fig. 12.** DYNAMENT, Premier High Range Carbon Dioxide Sensor, Non-Certified Version Type MSH-P-HCO2/NC

### 7.4 Sound

Pandora's voice processing unit comprises the following components:

- Four microphones (Figure 13) on the head of the robotic arm. Three of them form a triangle, with the two facing forward with an angle of 90° with each other and the third is on the back, at an angle of 135° degrees with the other two. The forth microphone is placed at a different level.
- One amplifier with four channels, one for each microphone.

- One analog band-pass filter per microphone.
- One DAS with four inputs with sample and hold, in order to achieve simultaneous recordings, one Analog to Digital converter, and digital filters.
- One Atmel Avr AT32UC3 which is the signal processing unit.

PANDORA *Voice* node is assigned with two tasks: to find a victim and identify its state. In exploration mode, *Voice* scans the space in order to grasp a sound that could direct to a victim. Upon the identification of a sound, a request is sent for thorough scan. If granted permission, *Voice* performs a second scan and provides *Data Fusion* with an estimate of the position of the victim, as well as a level of certainty of the estimation. When the vehicle approaches the victim and the robotic arm extends to approach him/her, *Voice* is assigned with the task to recognize his/her state. To do so, *Voice* measures the intensity of the sound, transforming it to dB. Then, the estimate of the state of the victim, as well as a level of certainty of the estimation is sent to *Data Fusion*.



Fig. 13. JOGA EM1.3 Microphone

## 8. Robot Locomotion

### 8.1 Platform mechanical design

With respect to previous years' mechanical design, we have improved the drawbacks of the platform. The PANDORA vehicle (Figure 14) employs an improved track system for its locomotion. The basic improvements are as follows:

- the use of a tensioner mechanism for the synthetic track (Figure 15)
- a 10mm increase in width and height of the vehicle's chassis
- the adjustment of idle rollers, so as to avoid track oscillations and damage

The metal frame of the robot is made of aluminum. The platform is equipped with two 50W brushless DC motors with a reduction planetary gearhead. The size of the robot is 560x230x200 mm. It is solid enough, appropriate to move in different types of terrain and climb easily a 40° slope.

## 9. Other Mechanisms

### 9.1 Robotic Arm

The PANDORA Robotic Arm was designed in order to provide the ability to reach most of the points of interest. The geometry selected led to a five degrees of freedom system, with rotational joints and cylindrical links as shown in Figure 16. Cabling issues specified link diameter. Joints are designed to allow folding of the arm and maximize angle limits in order to achieve optimal system workspace. Joints are powered by dc motor-encoder-reduction gearbox assemblies connected to appropriate drivers for control implementation. The head of the arm is designed to accommodate all essential sensors for victim identification and partly for navigation. The arm is provided with a gripper attached at the end of its last link for object manipulation.



**Fig. 16.** The PANDORA Robotic arm

Solutions for direct and inverse kinematics are incorporated in the arm's software. Different types of trajectories, such as linear or along the approaching vector have been implemented covering the range of required motions. Other kinematic calculations are also made related to the reachability of target points and the location of the arm's center of mass for a specific configuration and ground inclination to avoid vehicle turnover.


### 9.2 Stabilizer

The stabilization mechanism (Figure 17) is mounted on the chassis of the robotic platform. It allows the laser, the thermal sensors and the stereo vision camera to stay on the horizontal level, regardless of the robot's inclination. The stabilization is achieved via two linear DC-servomotors with fast response using a three dimensional Ocean Server's OS5000 compass, which gives measurements in degrees (Figure 18).

It provides the inclination of the robot with respect to the starting inclination. The compass communicates with an AVR microcontroller, through a serial UART. The compass is also used to stabilize the laser of the robot at the desired position. Its accuracy is lower than 0.5 degrees with 0.2 degrees resolution. Its refresh rate is at 40 Hz.



**Fig. 17.** The PANDORA stabilizer



**Fig. 18.** Ocean Server OS5000 3 Dimensional Compass

### 9.3 Computing System (Single Board Computer)

In order to accommodate the processing needs of PANDORA, we have built a Mini-ITX system (Figure 19) and placed it in the main body of the robot. The specifications of the system are the following: MSI IM-GM45 Mini-ITX mainboard, Intel Core2Quad mobile Q9000 processor, 4GB of DDR2 SO-DIMMs, a Solid State Drive with 32GB capacity, all power from a M4-ATX Pico PSU. The board's dimensions are 17x17cm and for peripheral interconnection there are 8 USB ports, 5 RS-232 serial ports, a PCI FireWire add-on card for the Stereo Camera, and a MiniPCIe WiFi capable add-on card with 2 pigtails for external antennas. The system power consumption is estimated at 80Watts at full computing load, without the USB, Serial and FireWire peripherals connected.

Communication between the single board computer (SBC) and the sensor network is performed through a serial interface. The higher level protocol designed allows strict timings and deterministic prediction of the CPU load generated by the sensors. This allows PANDORA to operate almost in real time.



**Fig. 19.** The MSI IM-GM45 Mini-ITX mainboard

## **10. Team Training for Operation (Human Factors)**

The operator(s) should be familiar with the GUI and the gamepad. He/she should be able to understand the readings of all sensors and act accordingly when allowed. He/she should go through extensive training and accomplish test missions in the specially constructed arena, which emulates a destruction scene.

## **11. Possibility for Practical Application to Real Disaster Site**

The fully deployed robotic platform has not been tested in a real environment yet. Nevertheless, the previous platform was exhibited at EXPO 2008 in Thessaloniki, and it was widely accepted. The Hellenic Rescue Team and the Institute of Engineering Seismology and Earthquake Engineering showed vivid interest in the potential of using the platform in real life. Additionally, we are planning to develop a similar platform with a local company for surveillance purposes.

## **12. System Cost**

The following table provides information on the cost of the parts of the PANDORA platform.

**Table 3.** Part names, quantities and cost

| Part Name                       | Quantity | Price (€)    | Website                                                                                                                            |
|---------------------------------|----------|--------------|------------------------------------------------------------------------------------------------------------------------------------|
| Mobile Platform                 | 1        | 4000         | Custom made                                                                                                                        |
| Arm                             | 1        | 2000         | Custom made                                                                                                                        |
| Platform Motors and Controllers | 2        | 1500         | <a href="http://www.maxonmotor.com">http://www.maxonmotor.com</a>                                                                  |
| Arm motors and Controllers      | 5        | 3500         | <a href="http://www.maxonmotor.com">http://www.maxonmotor.com</a><br><a href="http://www.hitecrcd.com">http://www.hitecrcd.com</a> |
| Laser sensor                    | 1        | 2300         | <a href="http://www.active-robots.com">www.active-robots.com</a>                                                                   |
| Single Board Computer           | 1        | 850          | <a href="http://www.mini-tft.de">http://www.mini-tft.de</a>                                                                        |
| Sensors                         | 20       | 1150         | <a href="http://www.active-robots.com">http://www.active-robots.com</a>                                                            |
| Stereo vision camera            | 1        | 1200         | <a href="http://www.videredesign.com">http://www.videredesign.com</a>                                                              |
| CO2 sensor                      | 1        | 200          | <a href="http://www.dynamment.com">http://www.dynamment.com</a>                                                                    |
| Part Name                       | Quantity | Price (€)    | Website                                                                                                                            |
| compass                         | 1        | 250          | <a href="http://www.ocean-server.com">http://www.ocean-server.com</a>                                                              |
| Microcontrollers                | 4        | 300          | <a href="http://www.atmel.com">http://www.atmel.com</a>                                                                            |
| Touch screen                    | 1        | 100          | <a href="http://www.olimex.com">http://www.olimex.com</a>                                                                          |
| Batteries                       | 2        | 800          | <a href="http://www.hoelleinshop.com">http://www.hoelleinshop.com</a>                                                              |
| Cabling and connectors          |          | 1000         |                                                                                                                                    |
| <b>TOTAL</b>                    |          | <b>19150</b> |                                                                                                                                    |

## References

1. Russell, S.J., Norvig, P.: Artificial Intelligence: A Modern Approach. 2nd edn. Upper Saddle River, New Jersey: Prentice Hall (2003)
2. Nidhi Kalra, N. Ferguson, D., Stentz, A.: Incremental reconstruction of generalized Voronoi diagrams on grids, Robotics and Autonomous Systems 57 (2009) 123–128
3. Dijkstra, E.W.: A note on two problems in connexion with graphs, Numerische Mathematik 1 (1959), 269–271
4. WillowGarage: OpenCV 2.1 C++ Reference. Available online at: <http://opencv.willowgarage.com/documentation/cpp/index.html>
5. Szeliski R.: Computer Vision: Algorithms and Applications, Springer 2011 ISBN 1868-0941
6. Viola P., Jones M.: Robust Real-Time Face Detection, International Journal of Computer Vision 57(2), 137–154, 2004
7. Joly, A., Buisson, O.: Logo retrieval with a contrario visual query expansion. In: MM '09: Proceedings of the seventeen ACM international conference on Multimedia, New York, NY, USA, ACM (2009) 581-584
8. Joly A., Buisson O.: A Posteriori Multi-Probe Locality Sensitive Hashing, MM'08, October 26-31, 2008. 209-218
9. Lowe D.: Distinctive image features from scale-invariant keypoint, International Journal of Computer Vision, 60, 2 (2004), 91-110